




|   |   |                                  |                                    |
|---|---|----------------------------------|------------------------------------|
| <b>Image Sensor</b>                                 | 2048 × 2048<br>Resolution                     | 180 Hz<br>Native Frame Rate      | 5.5 ms<br>Latency                  |
| <b>Tracking Performance &amp; Range<sup>1</sup></b> | 3D Accuracy<br>+/- 0.10 mm                    | Passive Markers<br>30 m (100')   | Active Markers<br>45 m (150')      |
| <b>Global Shutter</b>                               | Default Speed<br>0.25 ms                      | Minimum Speed<br>0.01 ms         | Maximum Speed<br>4.0 ms at 250 fps |
| <b>Image Processing Types</b>                       | Object<br>Segment                             | Raw Greyscale<br>MJPEG Grayscale |                                    |
| <b>Connections</b>                                  | GigE data port                                | PoE or PoE+ <sup>1</sup> power   | Ethernet camera sync               |
| <b>Lens &amp; Filter</b>                            | Stock Lens<br>51° × 51° FOV                   | Adjustable Focus                 | Adjustable f-stop                  |
| <b>LED Ring</b>                                     | 20 LEDs<br>Ultra High Power<br>850nm Infrared | Strobe Mode<br>Intensity control |                                    |

**Size & Weight**

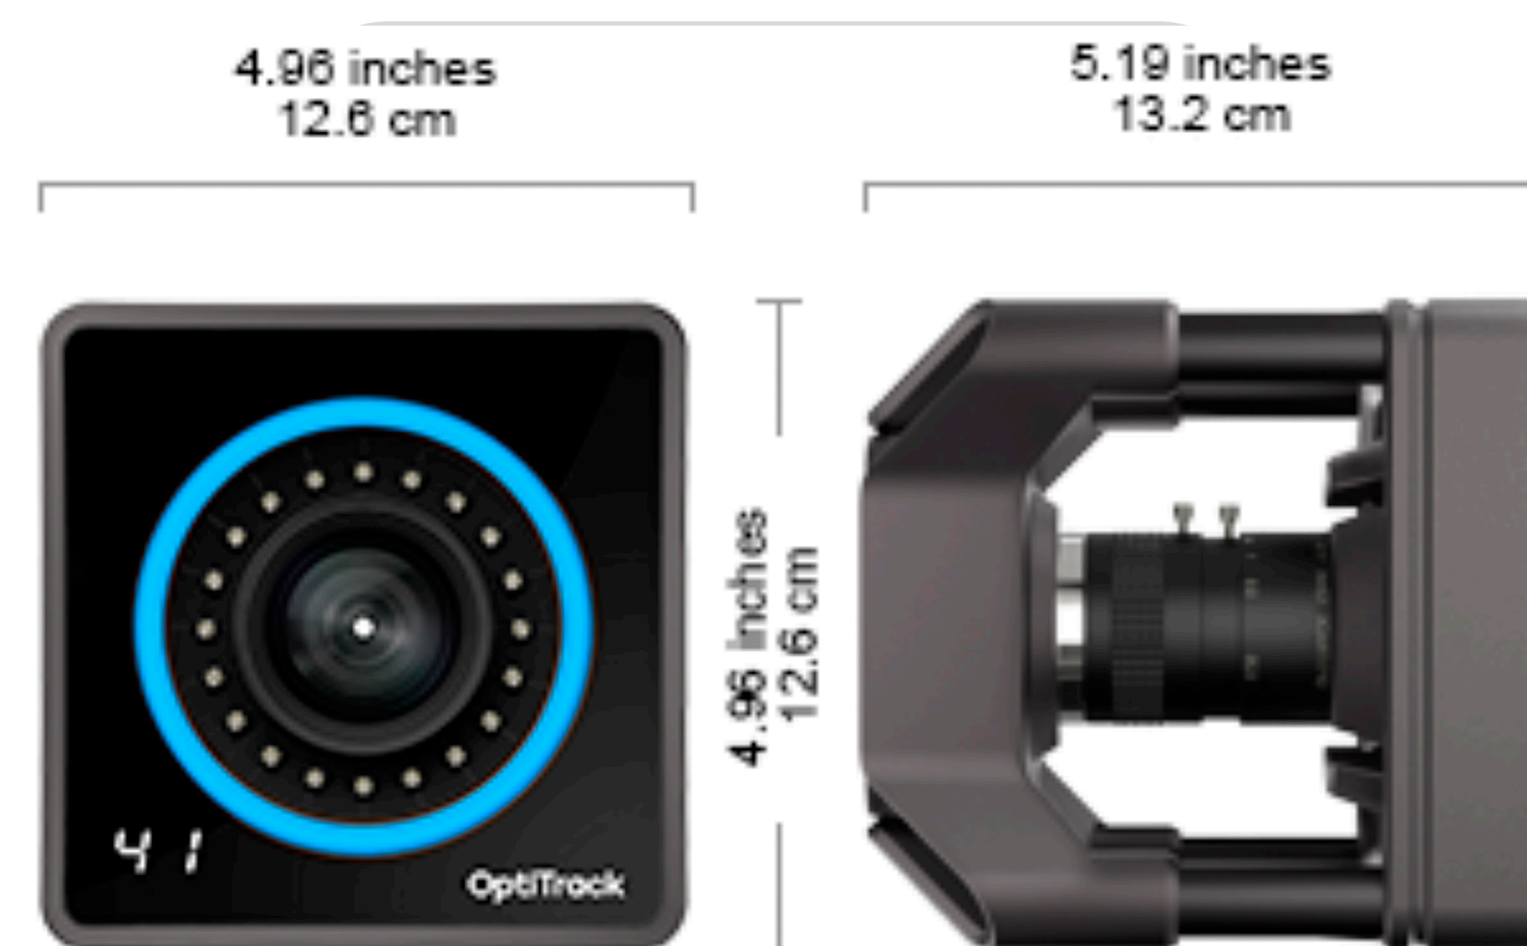

**Width**

4.96 inches (12.6 cm)

**Height**

4.96 inches (12.6 cm)

**Depth**

5.19 inches (13.2 cm)

**Weight**

3.0 pounds (1.36 kg)

**Camera Body**

Aluminum &  
Polycarbonate

1/4"-20 Standard  
Tripod Mount (×2)

2 digit numeric LEDs  
status indicators

Full-color LED health  
and activity indicator