




<b>Image Sensor</b>	1280 × 1024 Resolution	240 Hz Native Frame Rate	4.2 ms Latency
<b>Tracking Performance &amp; Range<sup>1</sup></b>	3D Accuracy +/- 0.30 mm	Passive Markers Not passive capable	Active Markers 15 m (50')
<b>Global Shutter</b>	Default Speed 0.25 ms	Minimum Speed 0.01 ms	Maximum Speed 3.9 ms at 240 fps
<b>Image Processing Types</b>	Object Segment	Raw Greyscale MJPEG Grayscale	
<b>Connections</b>	GigE data port	PoE power	Ethernet camera sync
<b>Lens &amp; Filter</b>	Stock Lens 56° × 46° FOV	Adjustable Focus	Optional Lenses 82° × 70° FOV, 70° × 58° FOV, 42° × 34° FOV

**Size & Weight**

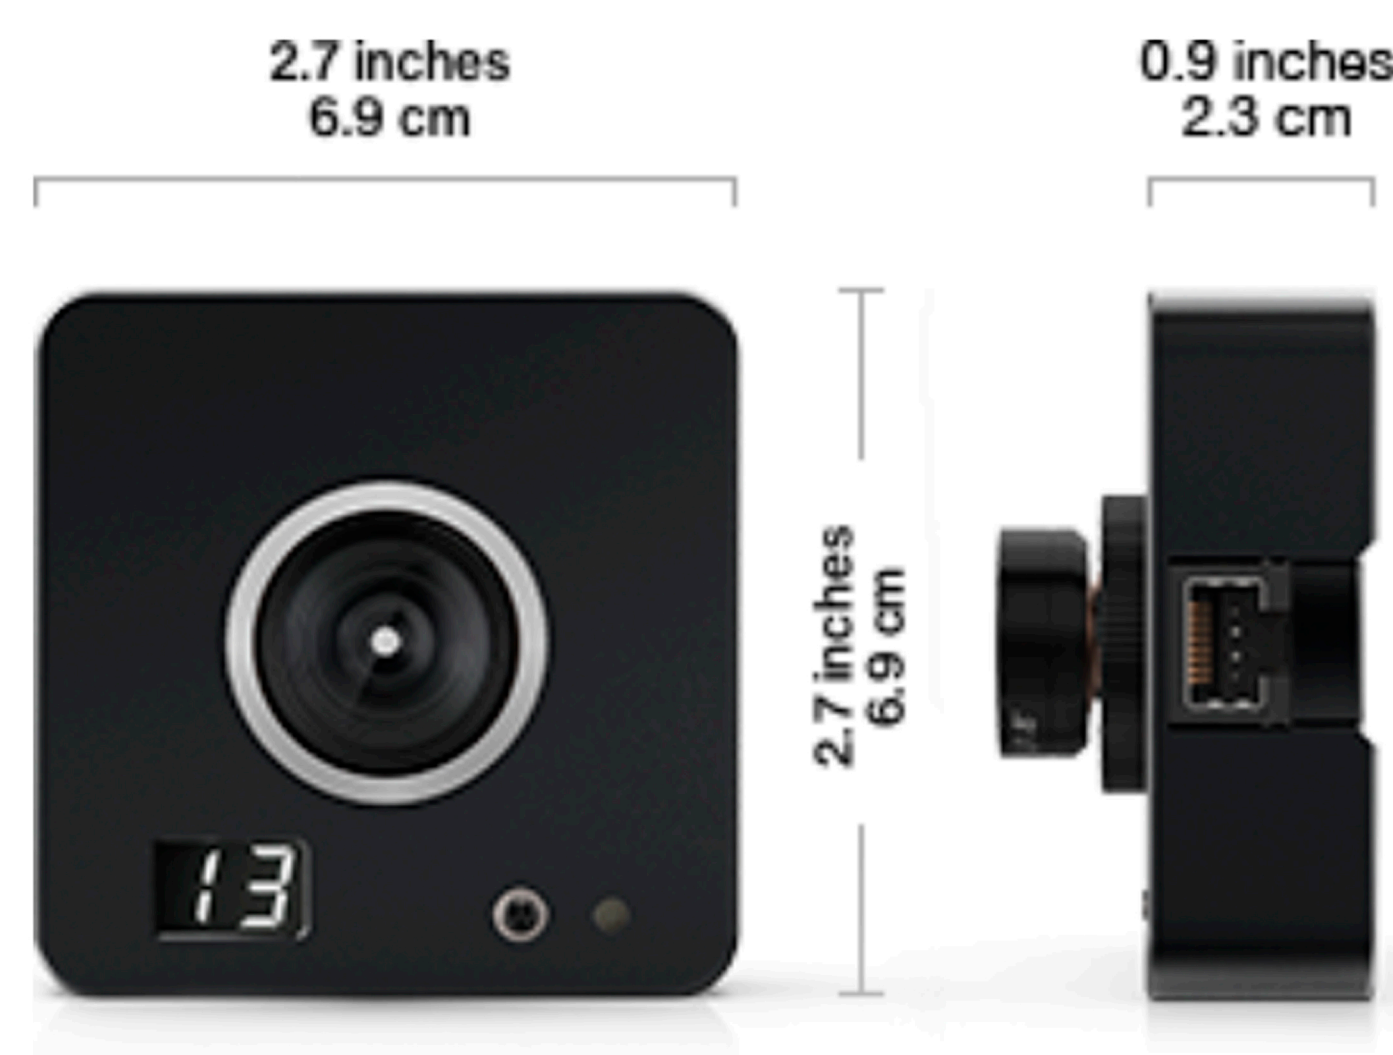

**Width**

2.7 inches (6.86 cm)

**Height**

2.7 inches (6.86 cm)

**Depth**

0.9 inches(2.3 cm)

**Weight**

0.48 pounds(0.21 kg)

<b>Camera Body</b>	Aluminum & Polycarbonate	1/4"-20 Standard Tripod Mount (×2)
	2 digit numeric LEDs status indicators	Full-color LED health and activity indicator